


# SLK4

## Sollatek Solar Lighting Kit

Self assembly 4 light solar lighting kit for home/small office use




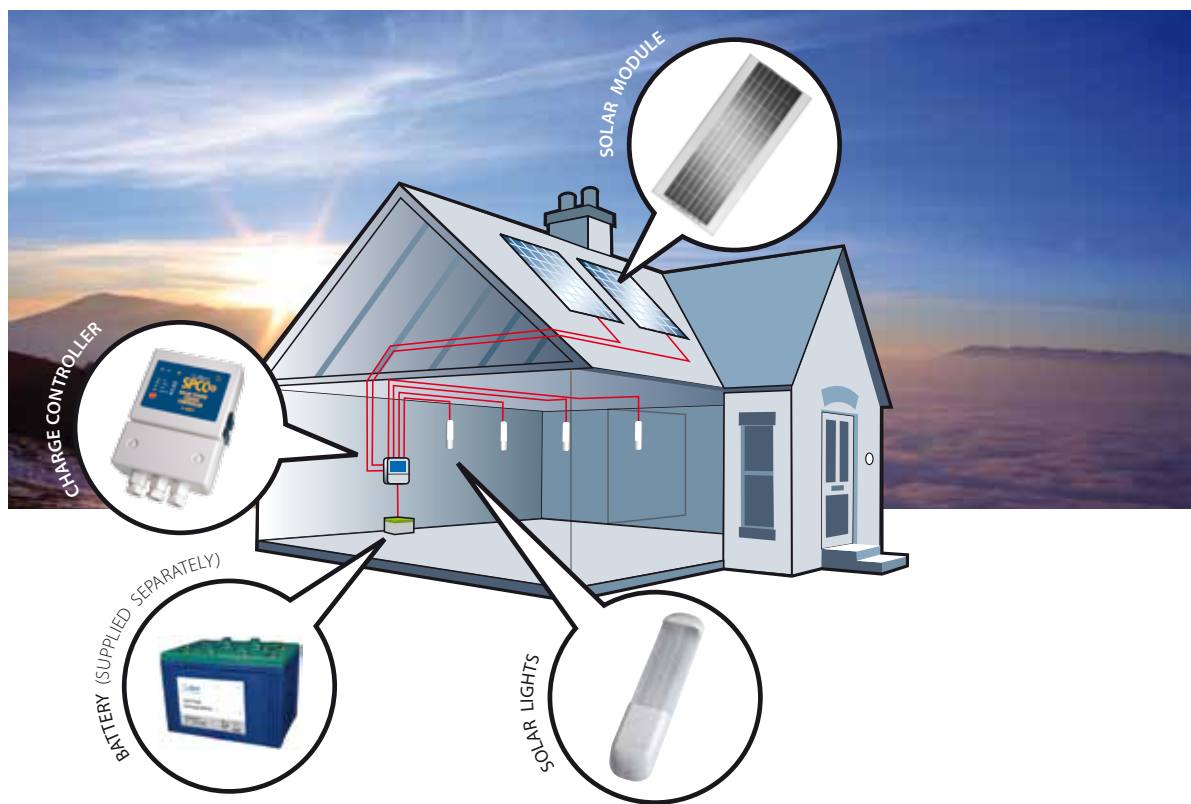

# SLK4

## Sollatek Solar Lighting Kit

Self assembly 4 light solar lighting kit for home/small office use

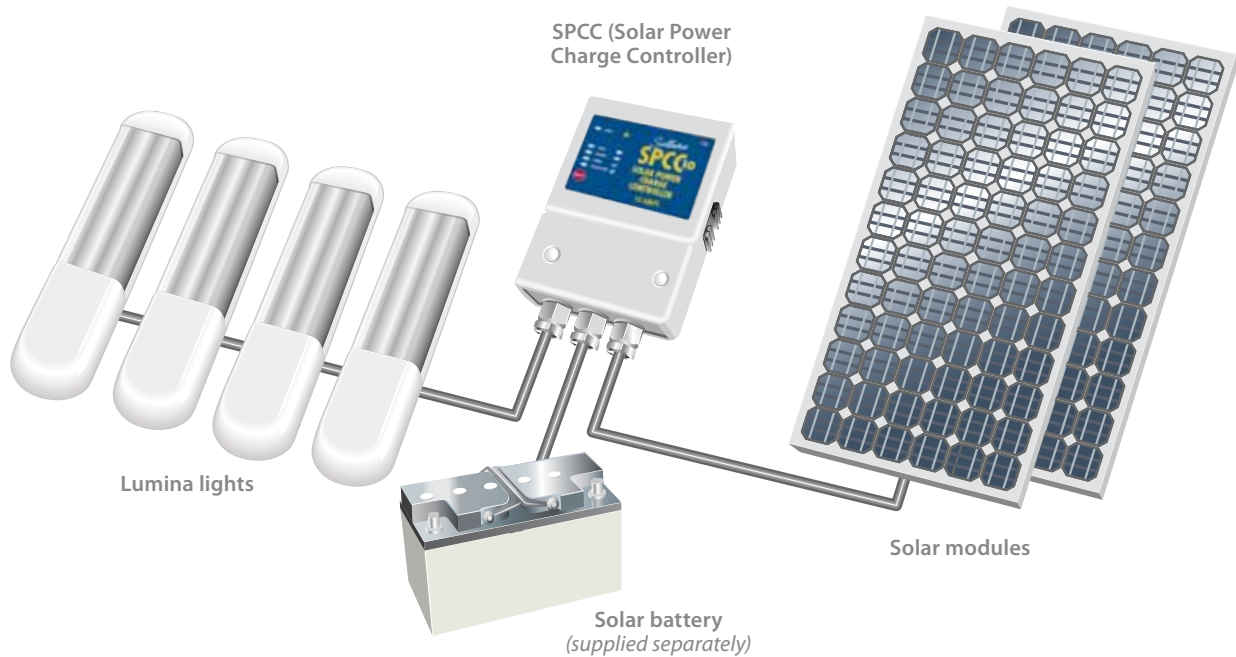

### Features

- Low cost
- Simple to install
- Fully expandable
- Maintenance-free
- High reliability

### Applications

- Homes
- Caravans and chalets
- Remote military outposts
- Beach huts and house boats
- Building sites
- Small offices

A robust, fully self contained solar lighting kit, the Sollatek SLK4 provides over 8 hours\* of lighting provided by its four lights. The two solar modules generate electricity during the day which is stored in the battery ready to power the lights.

Central to this kit is the Sollatek SPCC (Solar Power Charge Controller); it manages the charge from the two supplied solar modules and protects the battery from harmful over charge and over discharge, which ensures a long battery lifetime and provides overall system reliability.

The kit is fully expandable. The user can simply add further solar modules, batteries and lights, powered by total maximum of 150Wp of solar modules, in order to increase power to household appliances such as TV, radio, fans and others.

Simple to install with step-by-step instructions, the system provides a low cost reliable and expandable solar system, suitable for many applications.



SLK4 box contents

\*depending on location


## System Components

### Solar Modules (SP20-PS) >

High efficiency 20watt solar modules, using crystalline technology. Very small, light and durable, can be installed easily on roof surfaces or walls (dependent on the recommended tilt angle).

#### Features:

- Complete weather protection
- Easily mounted
- Protection from damage
- Crystalline technology
- Repetitive thermal cycling between -40°C and +90°C
- Repetitive cycling between -40°C and +85°C at 85% relative humidity
- Wind loading exceeding 255Km/h
- Impact of 25mm hail at terminal velocity (52mph)
- 25 years efficiency warranty

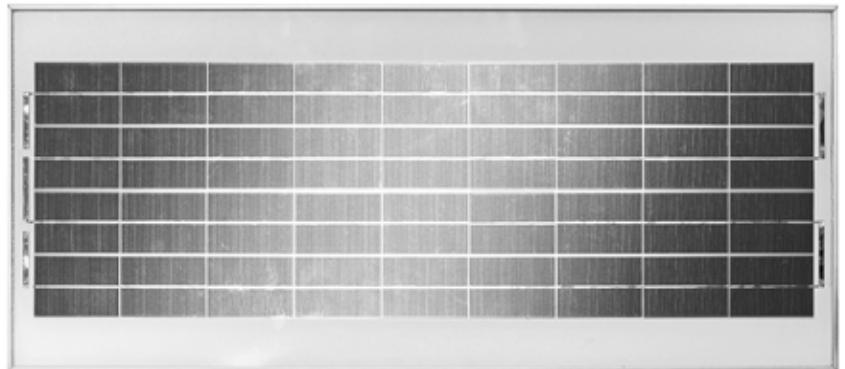

### < Solar Power Charge Controller (SPCC10)

The Sollatek SPCC, with in built lightning protection, controls the battery's charging and discharging, thereby protecting the battery from damage and improving its life cycle. Four LED indicators on the SPCC display the system's condition and battery state of charge. It features adjustable voltage limits for trade-off between system capacity and battery life. With additional safety features such as protection against reverse polarity and night time current flow, the Sollatek SPCC is the ultimate solution.

#### Features:

- 12 Volt
- Lightning protection
- Reverse polarity protected
- Battery overload protection
- Reverse discharge prevention
- Low power consumption
- Status indication 4 LED
- Reset switch

### Lights (Lumina) >

The Sollatek Lumina is highly efficient and specifically designed for solar systems. This light fitting utilises the PL type compact fluorescent tube, which together with the light inverter, ensures a tube life of 8,000 to 10,000 working hours under normal conditions. The SLK4 kit includes four Lumina light fittings and four 9watt fluorescent tubes each giving the light output equivalent to a 60watt light bulb. The Lumina has a switch that enables lights to be turned on/off individually. Simple wall/ceiling mounting.

#### Features:

- High efficiency compact fluorescent lamp (4pin)
- 12 DC input
- Low current
- Integral switch
- Supplied with 9w lamp, will operate 7, 9 or 11watt lamps
- Attractive design



## Battery Selection

**The SKL4 is not supplied with a battery and so this will need to be purchased separately. It must be a 12V, lead-acid type.**

It is recommended that you use a good quality deep discharge solar battery of between 36Ahr to 90Ahr (ampere /hour). If a solar battery is not available, then a recreation battery could be used but you should choose one of approximately twice the Ahr rating. If no better alternatives are available, then a vehicle/truck battery could be used but it should be 4 times the recommended Ahr rating, ie a minimum of 150Ahr, otherwise battery life and system performance will be reduced.

A 'sealed' valve regulated battery is a good option. Gel and AGM types are also good. If, however, a flooded type is used, then regular topping up with de-ionised water (available from auto suppliers) will be necessary.

Recommended Sollatek batteries are:

- i) SFGM36-12, 12V, VRLA, 36Ahr
- ii) SFGM48-12, 12V, VRLA, 48Ahr
- iii) SFGM57-12, 12V, VRLA, 57Ahr

For more information on batteries log on to [www.sollatek.com](http://www.sollatek.com)

A larger 12V battery can be used to give longer running time provided there is enough sunlight available during the day to charge it.

## Specifications

### Lumina Fluorescent light (4 units included)

Lamp wattage	9W
Nominal voltage	12VDC
Current consumption	0.6A
Tube type	fluorescent
Tube lumen output	600
Light colour	white
Temperature range	-10 to +50°C
Switch	push switch
Weight	0.3Kg
Dimensions (w x h x d)	80 x 350 x 50mm





### SPCC10 Solar Power Charge Controller

Solar current (max)	10A
Load current (max)	10A
Nominal voltage	12v
System status	x4 LEDs
Temperature range	0 to 70°C
Dimensions (w x h x d)	230 x 135 x 55 mm

### Solar Module SP20-PS (2 units included)

Typical power to peak power (Pm)	20Wp
Nominal battery to rated voltage (Vm)	12V
Optimum operating voltage (Vo)	17V
Open circuit voltage (Voc)	21V
Temperature range	-40 to +85°C
Weight	2.5Kg
Frame dimensions (w x h x d)	678 x 308 x 18mm

## Light run time

Number of hours the Lamps will run in various locations around the world using a standard 36Ahr 12V solar flat plate gel battery and 2 x 20WATT modules						
	East Africa	West Africa	North Africa	South Africa	Central Europe	Southern Europe
Number of Lumina's 	18-29 hours	25-30 hours	25-30 hours	27-30 hours	8-22 hours	13-22 hours
	9-15 hours	12-16 hours	12-16 hours	13-16 hours	4-11 hours	7-11 hours
	6-9 hours	8-10 hours	8-10 hours	9-10 hours	3-8 hours	5-7 hours
	5-7 hours	6-8 hours	6-8 hours	7-8 hours	2-6 hours	3-5 hours

These figures show a range from worst month in year for sunshine and best month. For example in West Africa you can expect to run 4 Lumina's for up to 8 hours in summer and 6 hours in winter months.

These figures assume the battery is in good condition and the installation has been carried out correctly.

It also assumes the Solar module installation and tilt angle is correct and is exposed to sunshine most of the day without any obstacles.

**Sollatek (UK) Ltd**  
Unit 10 Poyle 14 Newlands drive,  
Poyle, Slough SL3 ODX, UK.


**Tel:**  
International: +44 1753 688300  
National: 01753 688300

**Fax:**  
International: +44 1753 685306  
National: 01753 685306

**E-mail:** [sales@sollatek.com](mailto:sales@sollatek.com)

**Internet:** [www.sollatek.com](http://www.sollatek.com)



Sollatek provides you with full back up support and a two year worldwide warranty on all products, with local support in  over twenty countries worldwide.

**Sollatek**<sup>TM</sup>  
solar systems

[www.sollatek.com](http://www.sollatek.com)



**ISO9001: 2008 accredited company**

All weights and dimensions are approximate. Specifications are subject to change without prior notice. ©Sollatek (UK) Limited 2009. All Rights Reserved. SOLLATEK and the SOLLATEK device are the trade marks of the Sollatek group of companies.