10910120



VOLTAGE PROTECTION

VOLTSHIELD FRIDGEGUARD

♥ Voltshield[™]

FRIDGEGUARD Under voltage protection

Description

The FridgeGuard is a plug in adaptor that protects refrigeration equipment from low voltage problems. It will protect against surges, spikes, low voltage, power cuts and power back surges. These conditions are harmful to electrical and electronic equipment.


Function

By disconnecting the power when it is bad, the FridgeGuard safeguards against short term and long term damage to ensure higher efficiency from your appliances. 3 minutes start-up delay is built-in to protect against frequent fluctuations to ensure proper compressor shutdown and start-up.

Applications

Ideal for protection of all fridges, freezers, coolers and all refrigeration equipment.






Sollatek (UK) Ltd. Unit 10, Poyle 14, Newlands Drive, Poyle, Slough, SL3 0DX, UK

Tel: +44 (0)1753 688300 Fax: +44 (0)1753 685306 Technical support: support@sollatek.com Sales: sales@sollatek.com www.sollatek.com

iSense[™] function



The iSense[™] technology allows you to control how sensitive the FridgeGuard is to voltage problems. Using the iSense[™] dial you can set the desired level of protection and startup delay.

Dial settings


(H) High setting ensures greater protection by narrowing the acceptable voltage limits. This is ideal for users with less erratic mains supply that require better protection, typically in main cities where the power supply is fairly stable.

(L) Low setting ensures more working time as it will tolerate wider acceptable voltage limits. This is ideal for users with more erratic mains supply that constantly switches off, providing wider window of acceptable voltage limits.

TIMESAVE™ function

TIMESAVE[™] adds the following protective function:

The FridgeGuard has a built-in microprocessor which adds the advanced feature TimeSave.[™] TimeSave[™] means that when the mains return to normal, the unit checks the duration of the OFF time. If the unit has been off for more than the standard wait time, then it will reconnect the mains within 10 seconds. This means the FridgeGuard unit will give you more vital working time than any other switcher.

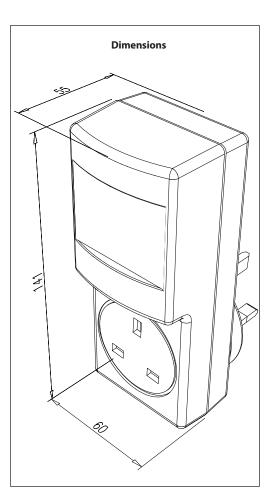

Model		FridgeGuard
Current rating		6A
Mains surge/spike response time		<10ns
Mains max spike/surge		6.5kA
Discharge		>3kA (8/20µs surges)
Spike protection		160J
Mains disconnect response time	Under-voltage	0.5 sec
Reconnect time		3 min
TimeSave™ delay		10 sec
iSense LVD high sensitivity iSense LVD low sensitivity		190VAC 180VAC
Dimensions (mm)	unpacked: packed:	140 x 60 x 90 250 x 130 x 100
Packing details		
	Carton qty Pallet qty	24 1008
Weight (gm)		186
Data line protection		Yes

ITEM FRIDGEGUARD – UK SOCKET FRIDGEGUARD – EUROPEAN SOCKET FRIDGEGUARD – 6A INDIAN SOCKET	230V 230V 230V	PRODUCT CODE 92605000 92605100 92605300		
For more information on the Sollatek's Voltage Protection Range refer to the Voltage protection catalogue or visit				
www.sollatek.com				



Sollatek (UK) Ltd. Unit 10, Poyle 14, Newlands Drive, Poyle, Slough, SL3 0DX, UK Tel: +44 (0)1753 688300 Fax: +44 (0)1753 685306 Technical support: support@sollatek.com Sales: sales@sollatek.com www.sollatek.com

©Sollatek (UK) Limited 2010. All Rights Reserved. SOLLATEK and the SOLLATEK device are the trade marks of the Sollatek group of companies.