

Voltright™

A/C-STAB L RANGE

VOLTAGE REGULATION AND STABILISATION
FOR AIR CONDITIONERS

Description

As both high and low mains voltage can damage your electrical equipment, the Sollatek A/C-Stab is designed to monitor and correct the incoming supply continuously.

If the voltage rises or drops, it will correct the output to ensure that the voltage reaching your equipment remains within the operating range of the appliances connected to it. See table in the next page.

The Sollatek A/C-Stab is easy to use, with a red LED indicating a problem with the voltage input, and a green LED indicating good input, and has an on/ off switch to power the unit.

Applications





Suitable for air conditioners.

Features

- Microprocessor controlled stabiliser
- Includes surge and spike suppression
- Fast response
- Incorporates over-voltage and under voltage disconnect (HVD+LVD function)
- 3 min startup delay
- Incorporates TIMESAVE™ function
- British design



Protection against:




Features:



TECHNICAL SPECIFICATIONS

Product	A/C-Stab 120L	A/C-Stab 150L
Application	Air Conditioner	Air Conditioner
Output Current (A) @45°C	12A RMS	15A RMS
Regulation Range		
Input		145-270V
Output		152-270V
Voltage Limits		
Vout High Disconnect		270V
Vout Low Disconnect		152V
Vout Low Reconnect		168V
Reconnect Time Delay		3min
Intelligent Time Delay		Yes
Spike Protection		190J, 6kA
Sockets		Direct
Plug		Direct
Display LEDs		LVD/HVD (Red), On (Green)
Enclosure		
Type		Wall Mount
Material		Metal + Plastic (Flame Retardant UL94 V-0)
Weight	3Kg	3.5Kg
Dimensions mm (D x L x H)		104 x 256 x 177
Packing		
Type		3 colour carton
Qty per carton		3
Qty per pallet		198

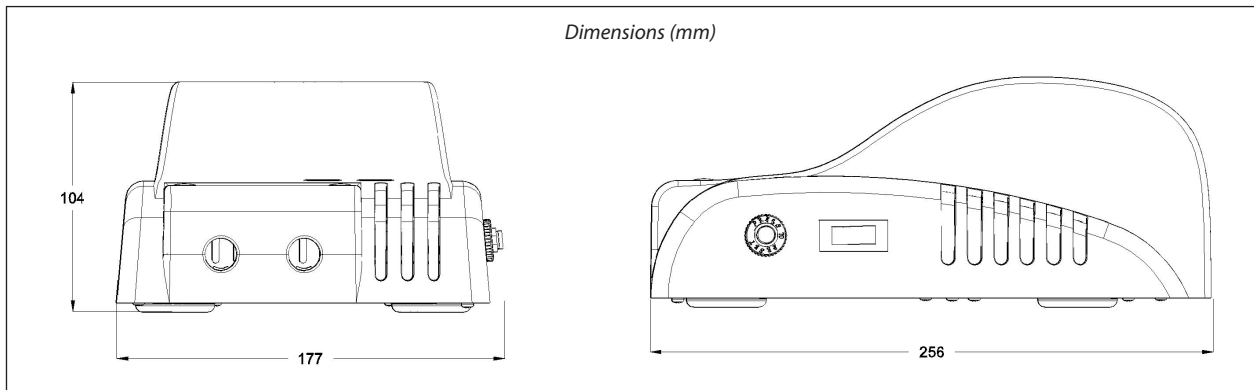

AVS™ function



The AUTOMATIC VOLTAGE SWITCHER (AVS™) function adds the following protective function: When the mains power supply fluctuates outside pre-set tolerances (nominally (152V-270V)) the power to your air conditioner is disconnected.

The AVS monitors the voltage for a short period to ensure the power has stabilised before re-connecting. In addition, the start-up delay (3 min) provides protection against power-back surges commonly experienced after resumption of power in a power cut situation. Surge and spike protection is also incorporated to ensure protection against these events which are very common. They are generated by lightning and nearby switching off and on of other equipment such as vacuum cleaners, pumps, motors, television, elevators etc.

TIMESAVE™ function



TIMESAVE™ adds the following protective function:

The built-in microprocessor adds the advanced feature TimeSave™. TimeSave™ means that when the mains return to normal, the unit checks the duration of the OFF time. If the unit has been off for more than the standard wait time (3 min), then it will reconnect the mains within 10 seconds. This means the Sollatek unit will give you more vital working time than any other stabiliser.

The 3 minute delay allows compressors to neutralise before re-starting.

PRODUCT CODE	ITEM
99LA1202	A/C-STAB120L 12A 145-270/152-270V 3MIN
99LA1502	A/C-STAB150L 15A 145-270/152-270V 3MIN

Sollatek (UK) Ltd.

Unit 9/10, Newlands Drive, Poyle 14 Industrial Estate, Colbrook, Slough, Berkshire SL3 0DX UK
 Tel: +44 (0)1753 688300 Fax: +44 (0)1753 685306 Technical support: support@sollatek.com Sales: sales@sollatek.com www.sollatek.com