

#### SOLLATEK DATA SHEET NO:

10910675

# GMC8

REMOTE MONITORING AND TRACKING DEVICE FOR COMMERCIAL BARISTA AND BEAN TO CUP COFFEE MACHINES



## Description

GMC8

The GMC8 is an advanced remote monitoring and tracking device to help optimise the management of commercial barista and bean to cup coffee machines.

The GMC8 provides real-time measurement and performance data which helps minimise revenue loss caused by fraud, bean impurity and/or machine downtime.

The GMC8 helps monitor machine activity, consumption (single or double coffees) and coffee to ensure customers are receiving quality coffee as well as gaining insight into customer behaviour and store peak times.

The GMC8 offers remote machine health monitoring including machine operation, boiler, water pump and water filter status allowing predictive maintenance and proactive alerts to be flagged reducing service calls and prolong downtime.


In automatic Bean to Cup machines the consumption per drink selected is monitored as well as machine stock levels and error codes for remote maintenance.

Wi-Fi is used for accurate geo-location and tracking.

Coffee Ambassadors can access the coffee machine remotely via the dedicated mobile application, so they are able to review all health, performance and diagnostic data.

## Feature

- Accurate measurement of single or double coffees and machine flushes
- Coffee machine health monitoring for better maintenance schedules
- Wi-Fi and GPS for precise geo-location and tracking no matter where the coffee machine is located
- GSM (2G) or LPWA (LTE-M and NB-IoT) options for secure data transmission to the online portal
- Support of EVA-DTS communication protocol for Bean to Cup machines
- Proximity marketing through iBeacon and Eddystone beacons
- Rechargeable battery for data transmission when mains power is OFF
- On-board accelerometer for movement detection
- Nine inputs for up to 5 flow meters and 4 CT sensors
- RS232 / RS485 interface direct to coffee machine controller
- Control external equipment
- AC (90 to 300 VAC) or DC (12 VDC) powered
- 2 LEDs for status indication
- · Easy on site installation within 15 minutes
- Compatible with any barista or automatic bean to cup machine including: Wega, Rancillio, LaCimbali, Carimali, WMF, Shaerer, Evoca, Faema, Casadio, etc.

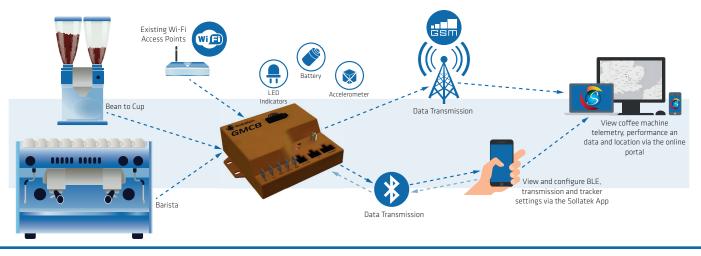

Sollatek (UK) Ltd. Sollatek House, Waterside Drive, Langley, Slough, SL3 6EZ, UK

Tel: +44 (1753) 214 500 Technical Support: sollateksupport@sollatek.com Sales: sales@sollatek.com www.sollatek.com

<sup>©</sup> Sollatek (UK) Limited 2020. All Rights Reserved. SOLLATEK and the SOLLATEK device are the trade marks of the Sollatek group of companies. The S logo and Sollatek are Trade Marks of Sollatek (UK) Limited. All trademarks acknowledged. Specifications subject to change without prior notice.


## **Technical Specification**

Cellular Connectivity						
Region		Global				
Antenna		Internal				
Туре	2G			LTE		
Category	EDGE, GSM, GPRS	5		Cat-M1, Cat-NB1		
Frequency Band	850 / 900 / 1800 / 19	900	B1, B2, B3, B4, E	35, B8, B12,B13, B18, B19, B20, B25, B28, B39		
Bluetooth Connectivity						
Type/Version		BLE 4.1				
RF Power Output	-20 dBm to +4 dBm					
Frequency	2.4 GHz ISM					
Connectivity	Eddystone & iBeacon					
Bluetooth Standard		IEEE 802.15.1				
Wi-Fi Geo-location						
Frequency Range		2.4 0	iHz			
Protocol		802.11	o/g/n			
GNSS Tracking						
GNSS System		GPS, GLONAS, Galileo, QZSS				
Position Accuracy		< 3 m				
Sensitivity	-146	dBm (cold start) ar	nd -157dBm (trac	king)		
Accelerometer						
Measurement Direction		3-a)	kis			
Measurement Scale		±2G				
Battery						
Battery Type	Rechargeable Lithium polymer					
Nominal Voltage		3.7 V				
Capacity		700 mAh				
Typical Run Time	Appro	Approx. 15 days (based on hourly transmission)				
Memory						
Size	32 Mt	32 Mbit for data storing between transmission				
User Interface						
LEDs		1 x Power ; 1 x GSM				
Connectors						
Input	2x3-way Terminal for 5 x Flow Meters, 2x4-way Terminal for 4 x CT Inputs					
Relay Rating		10 A				
Power & Output Connector	5 x 0.25" (6.35 mm) male Faston Tab terminals					
Data Interface	2x5-way Terminal for UART, RS485 & RS232 communication					
GPS Antenna		SMA Socket				
Power & Voltage Protection						
Operating Voltage Range	90 to 300 VAC or 12 VDC					
Working Frequency	50-60 Hz					
Voltage Protection	Spikes & Surges					
Environmental						
IP Rating	Electronics: IP65					
Operating Temperature	0°C to +60°C (32°F to +140°F)					
Operating Humidity	<90% RH non-condensing					
Certification / Standards						
Product Certification	CE, EN 62368-1, EN 301 489-1, EN 301 489-7, EN 301 489-17, EN61326-1, EN 301 511, EN 300 328, EN62311					
Flammability	UL94 v	-0 @ 1.5 mm, GWF	l = 960°C, GWIT	= 850°C		
Mechanical & Shipping						
Mounting		M4 self-tapping				
	Quantity	Weig	-	Dimensions		
Product	1	210 g (	TBC)	112.0 x 89.0 x 31.9 mm		
Inner Carton	N/A	N/.		N/A		
Outer Carton	100	23 kg (		510 x 560 x 250 mm		
Pallet	Air Freight: 1200	290 kg		1200 x 1000 x 900 mm		
	Sea Freight: 3200	750 kg	(TBC)	1200 x 1000 x 2150 mm		


Sollatek (UK) Ltd. Sollatek House, Waterside Drive, Langley, Slough, SL3 6EZ, UK

Tel: +44 (1753) 214 500 Technical Support: sollateksupport@sollatek.com Sales: sales@sollatek.com www.sollatek.com

## **Dimensional Drawing**

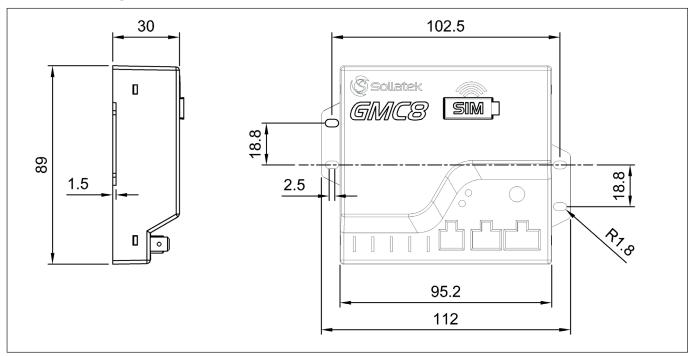

## **GMC8** Architecture Diagram

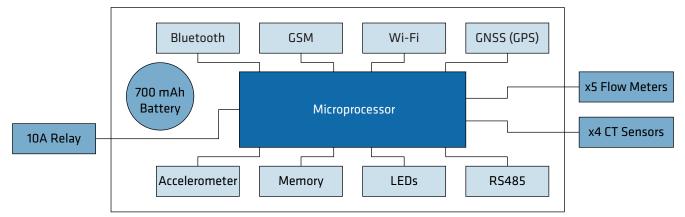

## **Device Configuration Table**

	<b>GMC8-4BWR</b> (95384RBW)	<b>GMC8-4BWR-D</b> (95384RBW-D)
Model Description	BLE - Wi-Fi - RS232	BLE - Wi-Fi - RS232
Power	AC	DC
Use	Barista Machines	Bean to Cup Machine
GPS Antenna	$\checkmark$	$\checkmark$
Power Cable	✓	$\checkmark$
AC Switch Input Cable	$\checkmark$	
Flow Meter Cable	$\checkmark$	
2x CT Cable or 4x CT Cable	$\checkmark$	
Relay Output Cable	✓	
Comms Cable		$\checkmark$

Sollatek (UK) Ltd. Sollatek House, Waterside Drive, Langley, Slough, SL3 6EZ, UK

Tel: +44 (1753) 214 500 Technical Support: sollateksupport@sollatek.com Sales: sales@sollatek.com www.sollatek.com

© Sollatek (UK) Limited 2020. All Rights Reserved. SOLLATEK and the SOLLATEK device are the trade marks of the Sollatek group of companies. The S logo and Sollatek are Trade Marks of Sollatek (UK) Limited. All trademarks acknowledged. Specifications subject to change without prior notice.

## Accessories

Part Number	Description	
6000056	GPS Antenna 1.8V 60cm Cable R/A SMA (M)	
8M291041-3	Power Cable	1800 PRI Bit Mediater Dia
8M291041-2	AC Switch Input Cable	1800
8M291041-6	2x CT Cable	
8M291041-4	Flow Meter Cable	
8M291041-1	Relay Output Cable	1800
8M291041-9	Comms Cable	
8M291041-5	4x CT Cable	

For more information on the Sollatek product range visit www.sollatek.com



Sollatek (UK) Ltd. Sollatek House, Waterside Drive, Langley, Slough, SL3 6EZ, UK Tel: +44 (1753) 214 500 Technical Support: sollateksupport@sollatek.com Sales: sales@sollatek.com www.sollatek.com

MBA 19/11/2020

© Sollatek (UK) Limited 2020. All Rights Reserved. SOLLATEK and the SOLLATEK device are the trade marks of the Sollatek group of companies. The S logo and Sollatek are Trade Marks of Sollatek (UK) Limited. All trademarks acknowledged. Specifications subject to change without prior notice.